

6MBP75VBA060-50


IGBT Modules

IGBT MODULE (V series)

600V / 75A / IPM

■ Features

- Temperature protection provided by directly detecting the junction temperature of the IGBTs
- Low power loss and soft switching
- Compatible with existing IPM-N series packages
- High performance and high reliability IGBT with overheating protection
- Higher reliability because of a big decrease in number of parts in built-in control circuit

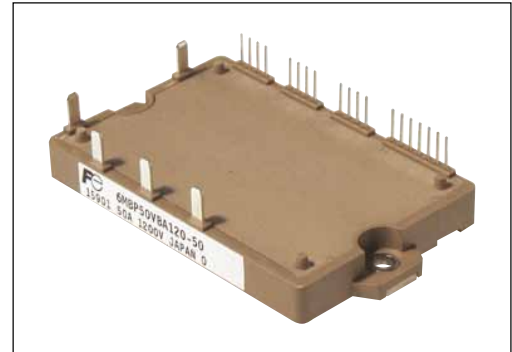

■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings (T_c=25°C, V_{cc}=15V unless otherwise specified)

Items	Symbol	Min.	Max.	Units
Collector-Emitter Voltage (*1)	V _{CEs}	0	600	V
Short Circuit Voltage	V _{sc}	200	400	V
Collector Current	DC	I _c	75	A
	1ms	I _c pulse	150	A
	Duty=100% (*2)	-I _c	75	A
Collector Power Dissipation	1 device (*3)	P _c	198	W
Supply Voltage of Pre-Driver (*4)	V _{cc}	-0.5	20	V
Input Signal Voltage (*5)	V _{in}	-0.5	V _{cc} +0.5	V
Alarm Signal Voltage (*6)	V _{ALM}	-0.5	V _{cc}	V
Alarm Signal Current (*7)	I _{ALM}	-	20	mA
Junction Temperature	T _j	-	150	°C
Operating Case Temperature	T _{opr}	-20	110	°C
Storage Temperature	T _{stg}	-40	125	°C
Solder Temperature (*8)	T _{sol}	-	260	°C
Isolating Voltage (*9)	V _{iso}	-	AC2500	V _{rms}
Screw Torque	Mounting (M4)	-	1.7	Nm

Note *1: V_{CEs} shall be applied to the input voltage between terminal P-(U,V, W) and (U,V, W)-N.

Note *2: Duty=125°C/R_{th(j-c)}D / (I_F×V_F Max.)×100

Note *3: P_c=125°C/R_{th(j-c)}Q

Note *4: V_{cc} shall be applied to the input voltage between terminal No.4 and 1, 8 and 5, 12 and 9, 14 and 13.

Note *5: V_{in} shall be applied to the input voltage between terminal No.3 and 1, 7 and 5, 11 and 9, 16~18 and 13.

Note *6: V_{ALM} shall be applied to the voltage between terminal No.2 and 1, 6 and 5, 10 and 9, 19 and 13.

Note *7: I_{ALM} shall be applied to the input current to terminal No.2,6,10 and 19.

Note *8: Immersion time 10±1sec. 1time.

Note *9: Terminal to base, 50/60Hz sine wave 1minute.

● Electrical Characteristics (T_j=25°C, V_{cc}=15V unless otherwise specified)

Items	Symbol	Conditions	Min.	Typ.	Max.	Units		
Inverter	Collector Current at off signal input	I _{ces}	V _{ce} =600V		-	-	1.0	mA
	Collector-Emitter saturation voltage	V _{CE(sat)}	I _c =75A	Terminal	-	-	2.0	V
				Chip	-	1.4	-	V
	Forward voltage of FWD	V _F	I _F =75A	Terminal	-	-	2.4	V
Chip				-	1.8	-	V	
Switching time	t _{on}	V _{dc} =300V, T _j =125°C	1.1	-	-	μs		
	t _{off}	I _c =75A	-	-	2.1	μs		
	t _{rr}	V _{dc} =300V I _F =75A	-	-	0.3	μs		
Supply current of P-side pre-driver (per one unit)	I _{ccp}	Switching Frequency= 0-15kHz	-	-	15	mA		
Supply current of N-side pre-driver	I _{ccn}	T _c =-20~110°C	-	-	45	mA		
Input signal threshold voltage	V _{in} (on)	Vin-GND	ON	1.2	1.4	1.6	V	
	V _{in} (off)		OFF	1.5	1.7	1.9	V	
Over Current Protection Level	I _{oc}	T _j =125°C	113	-	-	A		
Over Current Protection Delay time	t _{IOC}	T _j =125°C	-	5	-	μs		
Short Circuit Protection Delay time	t _{sc}	T _j =125°C	-	2	3	μs		
IGBT Chips Over Heating Protection Temperature Level	T _{JOH}	Surface of IGBT Chips	150	-	-	°C		
Over Heating Protection Hysteresis	T _{JH}		-	20	-	°C		
Under Voltage Protection Level	V _{UV}		11.0	-	12.5	V		
Under Voltage Protection Hysteresis	V _H		0.2	0.5	-	V		
Alarm Signal Hold Time	t _{ALM(OC)}	ALM-GND T _c =-20~110°C	V _{cc} ≥ 10V	1.0	2.0	2.4	ms	
	t _{ALM(UV)}			2.5	4.0	4.9	ms	
	t _{ALM(TJOH)}			5.0	8.0	11.0	ms	
Resistance for current limit	R _{ALM}		960	1265	1570	Ω		

● Thermal Characteristics (T_c = 25°C)

Items		Symbol	Min.	Typ.	Max.	Units	
Junction to Case Thermal Resistance (*10)	Inverter	IGBT	R _{th(j-c)Q}	-	-	0.63	°C/W
		FWD	R _{th(j-c)D}	-	-	0.97	°C/W
Case to Fin Thermal Resistance with Compound		R _{th(c-f)}	-	0.05	-	°C/W	

Note *10: For 1device, the measurement point of the case is just under the chip.


● Noise Immunity (V_{dc}=300V, V_{cc}=15V)

Items	Conditions	Min.	Typ.	Max.	Units
Common mode rectangular noise	Pulse width 1μs, polarity ±, 10 minute Judge : no over-current, no miss operating	±2.0	-	-	kV

● Recommended Operating Conditions

Items	Symbol	Min.	Typ.	Max.	Units
DC Bus Voltage	V _{dc}	-	-	400	V
Power Supply Voltage of Pre-Driver	V _{cc}	13.5	15.0	16.5	V
Arm shoot through blocking time for IPM's input signal	t _{dead}	1.0	-	-	μs
Screw Torque (M4)	-	1.3	-	1.7	Nm







■ Block Diagram






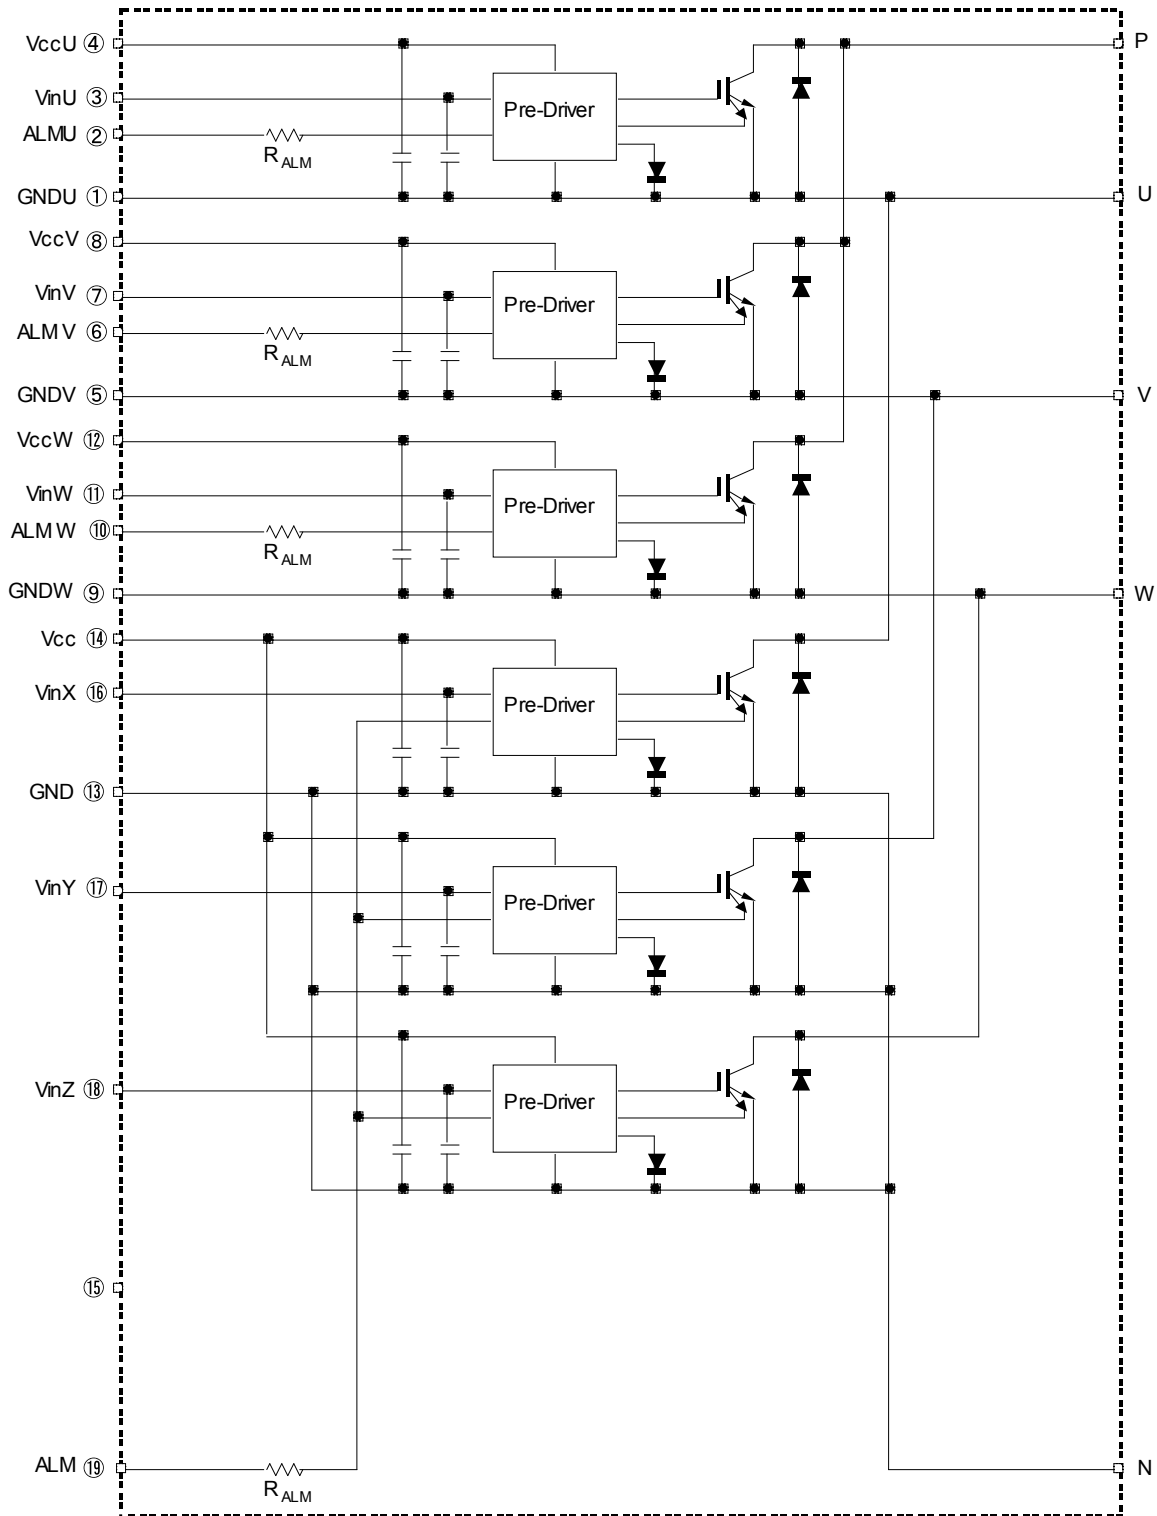








Pre-drivers include following functions





1. Amplifier for driver
2. Short circuit protection
3. Under voltage lockout circuit
4. Over current protection
5. IGBT chip over heating protection

■ Characteristics (Representative)

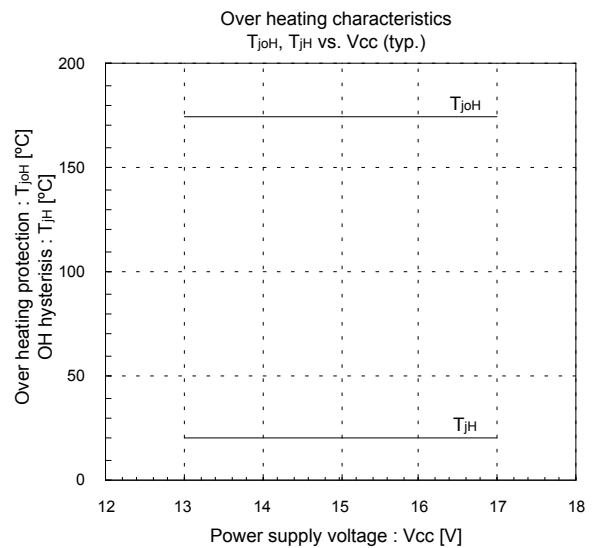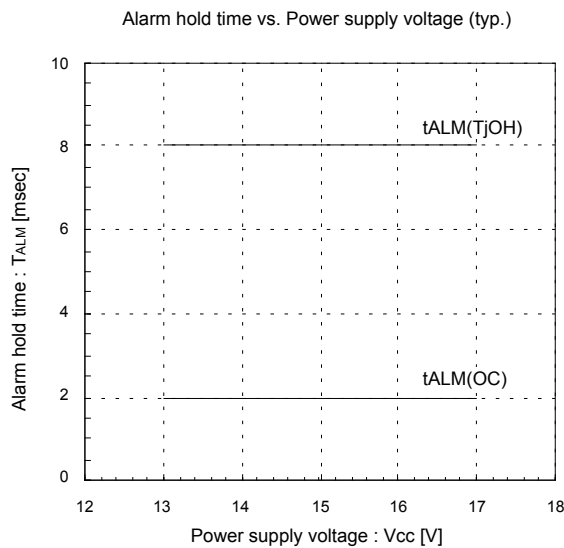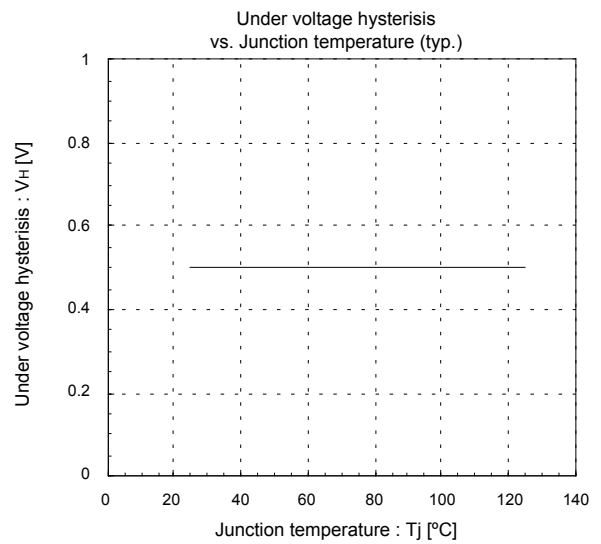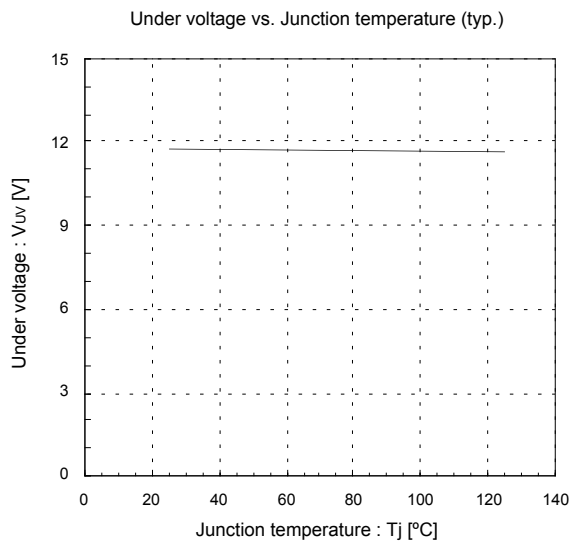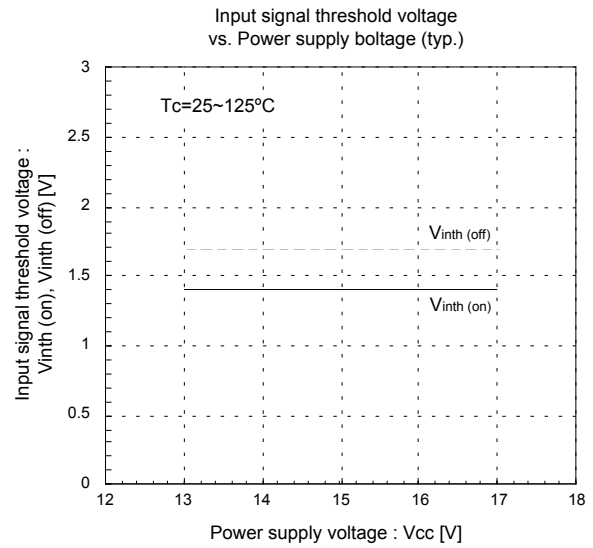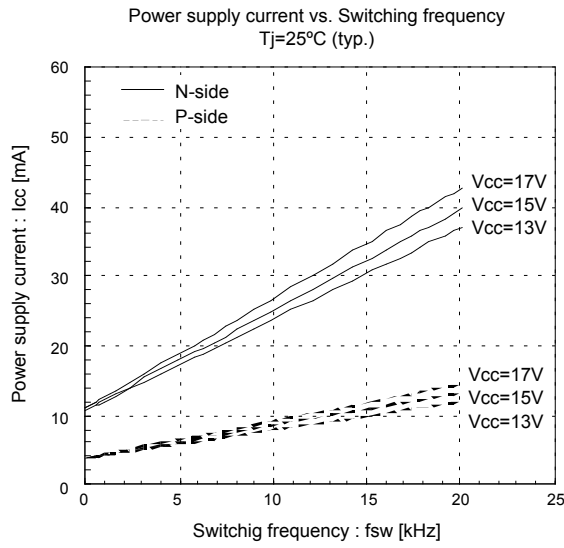


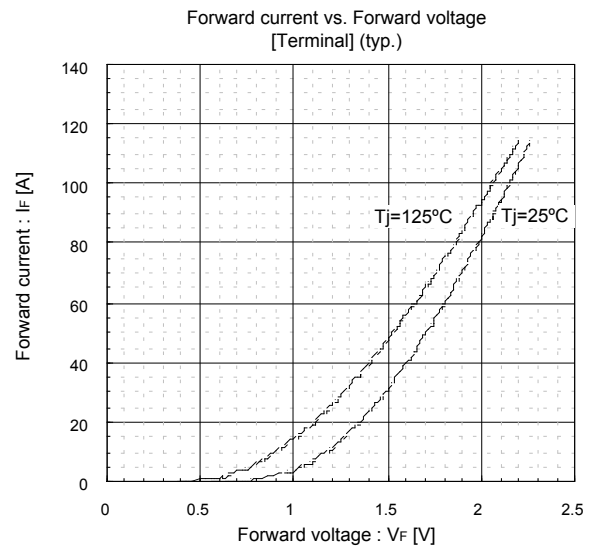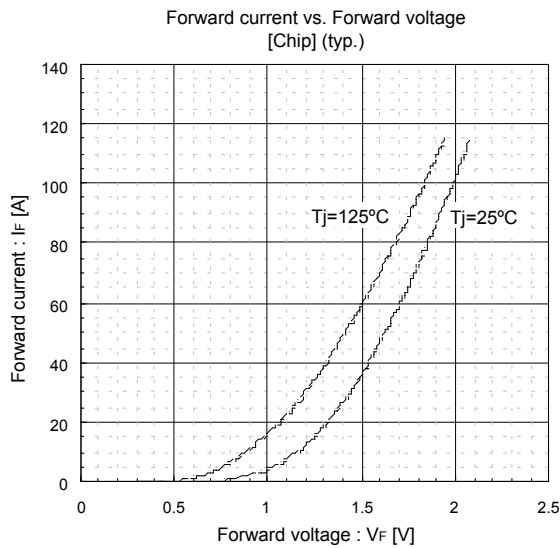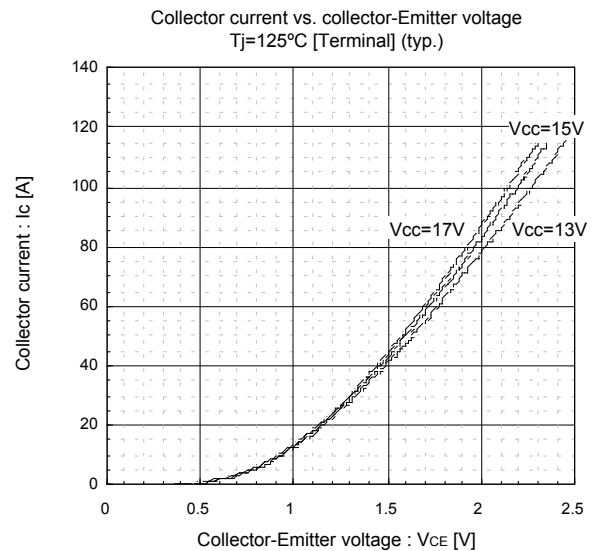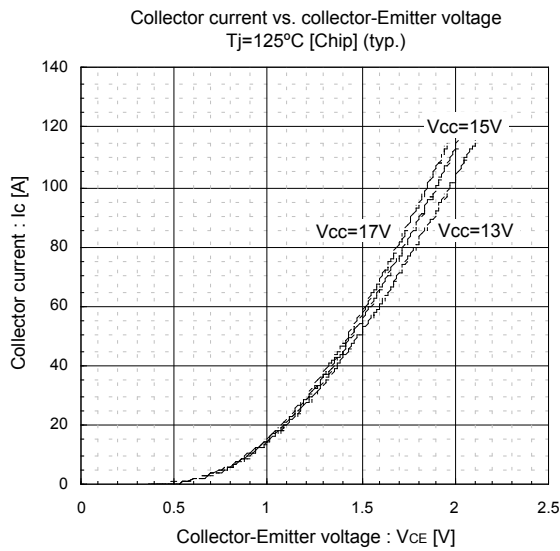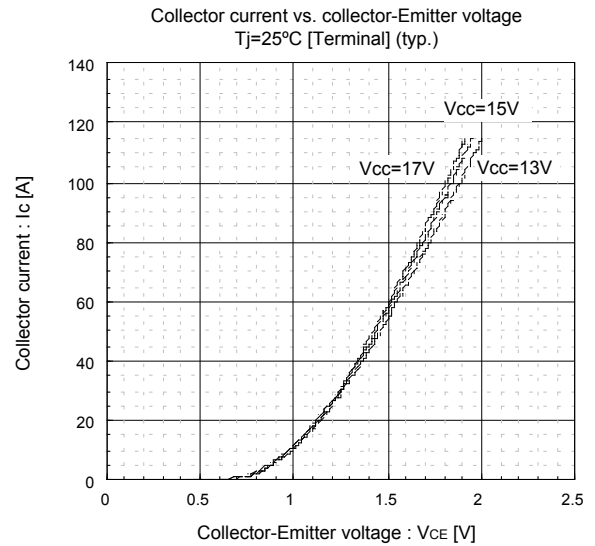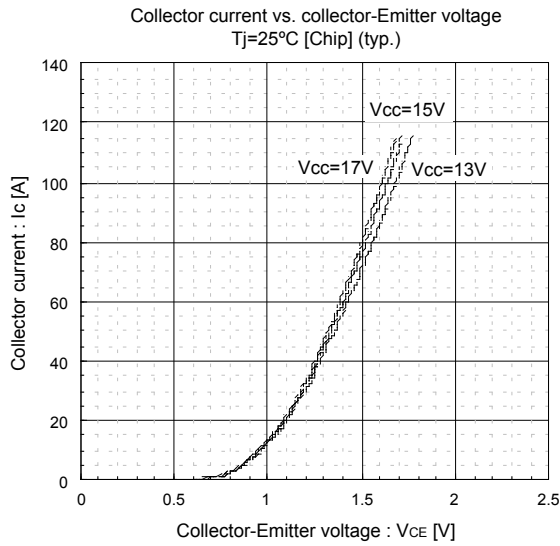

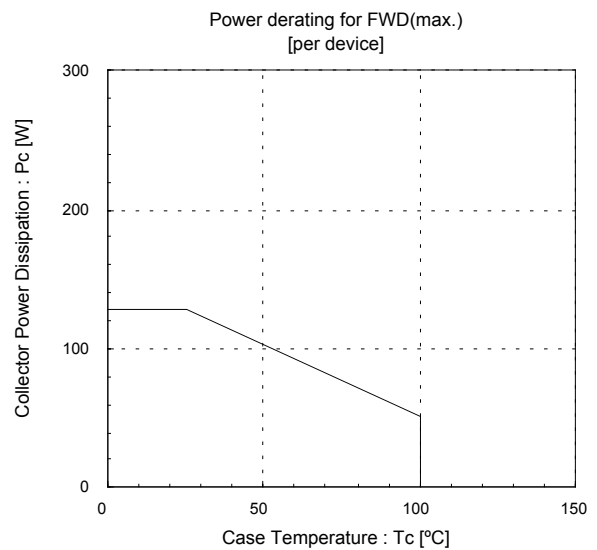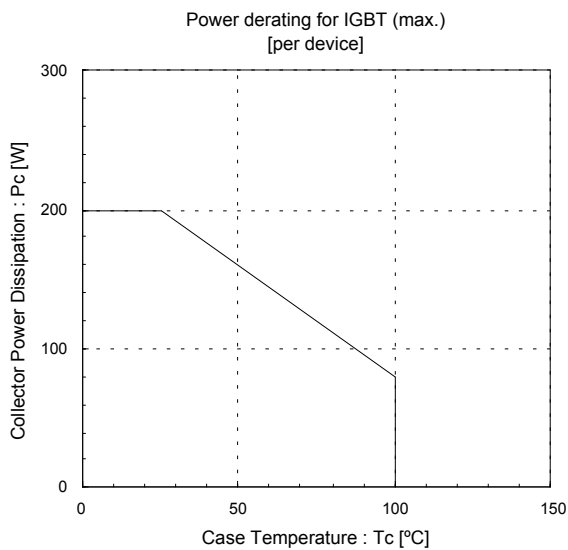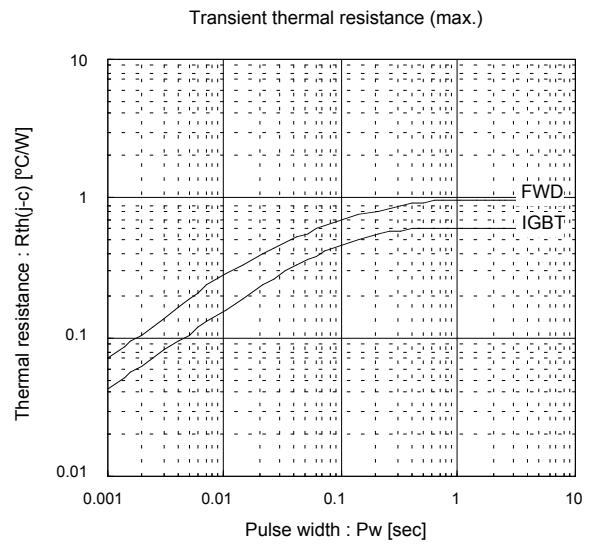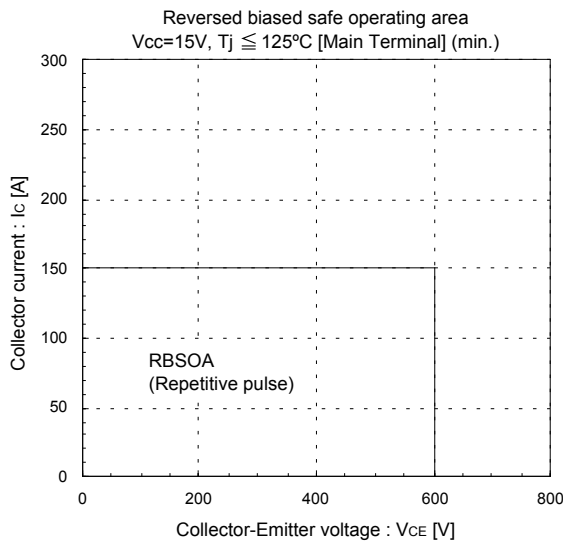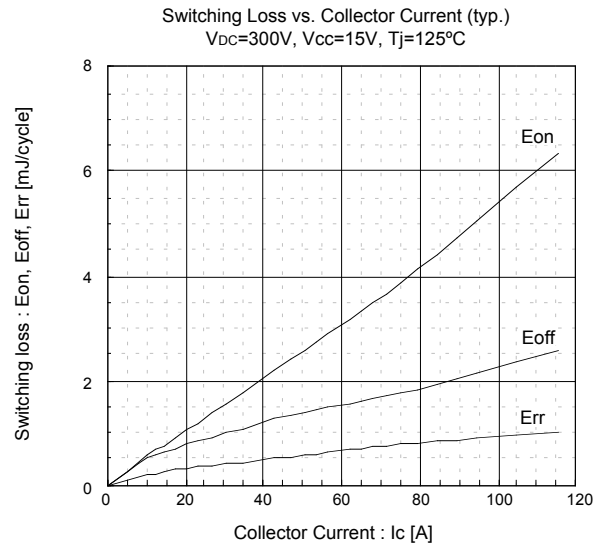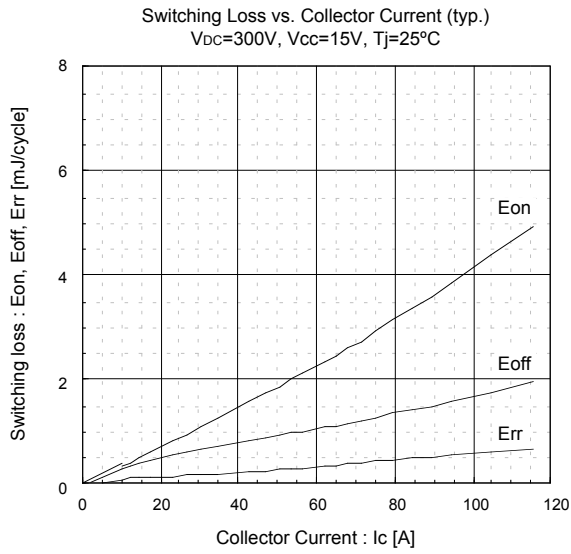

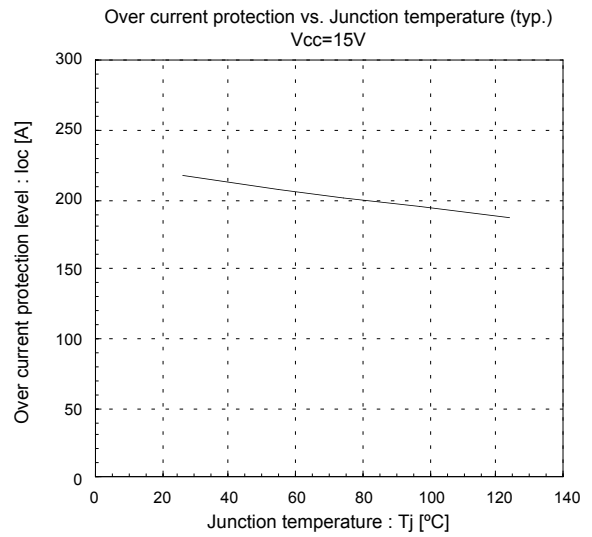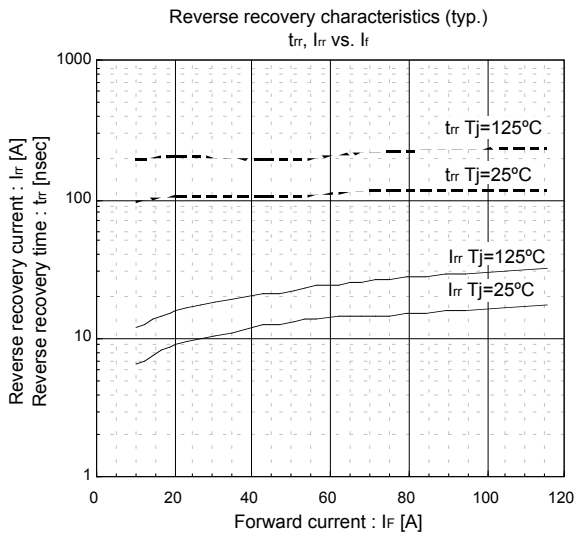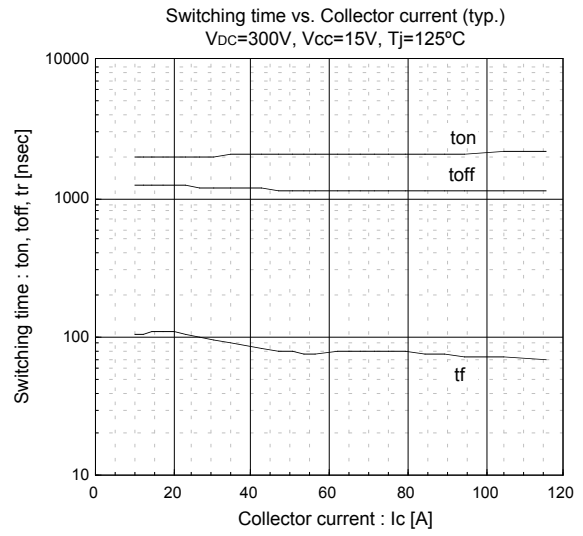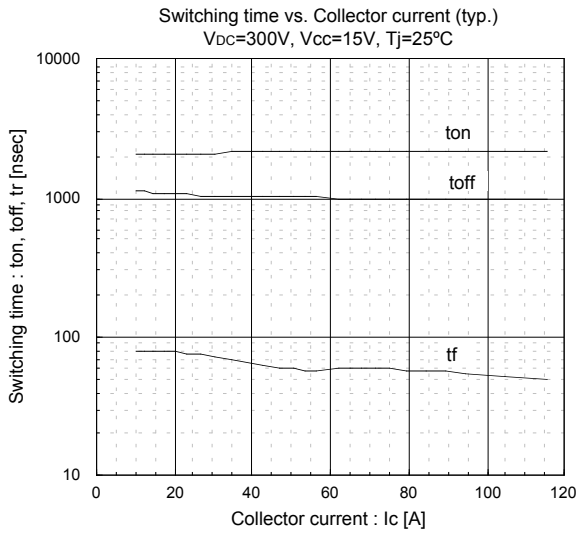

■ Outline Drawings, mm

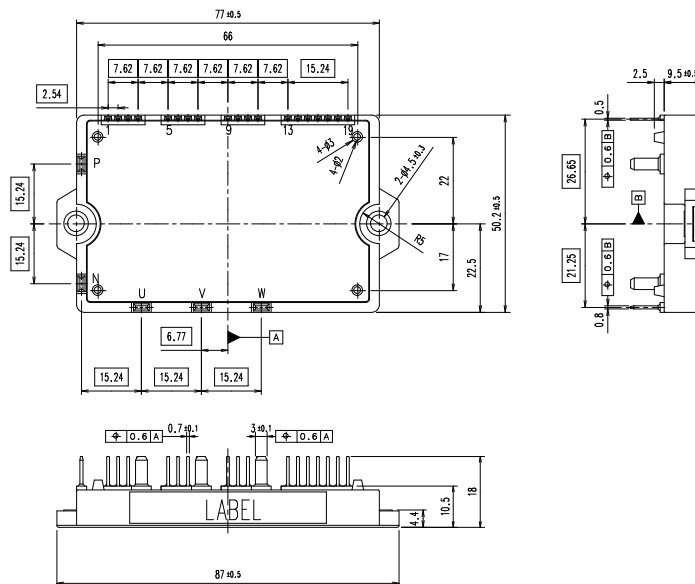

WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of May 2011.
The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design failsafe, flame retardant, and free of malfunction.
4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
 - Computers
 - Machine tools
 - OA equipment
 - Audiovisual equipment
 - Communications equipment (terminal devices)
 - Electrical home appliances
 - Personal equipment
 - Industrial robots etc.
 - Measurement equipment
5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
 - Transportation equipment (mounted on cars and ships)
 - Traffic-signal control equipment
 - Emergency equipment for responding to disasters and anti-burglary devices
 - Medical equipment
 - Trunk communications equipment
 - Gas leakage detectors with an auto-shut-off feature
 - Safety devices
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
 - Space equipment
 - Submarine repeater equipment
 - Aeronautic equipment
 - Nuclear control equipment
7. Copyright ©1996-2011 by Fuji Electric Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.
8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.