7MBR150VX120-50

IGBT Modules

IGBT MODULE (V series)
1200V / 150A / PIM

Features

Low V_{CE}(sat)
Compact Package
P.C.Board Mount Module
Converter Diode Bridge Dynamic Brake Circuit
RoHS compliant product

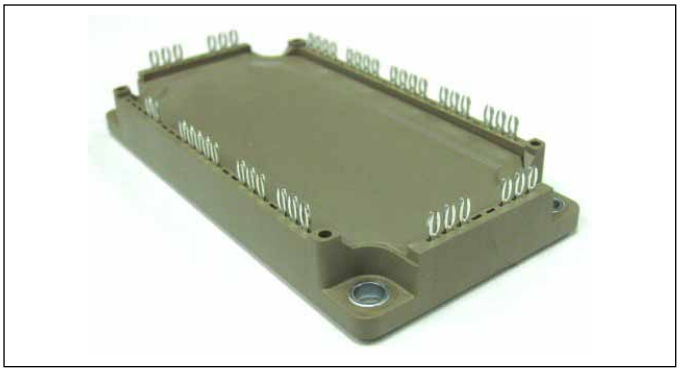

Applications

Inverter for Motor Drive
AC and DC Servo Drive Amplifier
Uninterruptible Power Supply

Maximum Ratings and Characteristics

● Absolute Maximum Ratings (at Tc=25°C unless otherwise specified)

Items		Symbols	Conditions		Maximum ratings	Units
Inverter	Collector-Emitter voltage	V_{CES}			1200	V
	Gate-Emitter voltage	V_{GES}			±20	V
	Collector current	Ic	Continuous	Tc=100°C	150	A
		Icp	1ms	Tc=80°C	300	
		-Ic			150	
		-Ic pulse	1ms		300	
	Collector power dissipation	Pc	1 device		885	W
Brake	Collector-Emitter voltage	V_{CES}			1200	V
	Gate-Emitter voltage	V_{GES}			±20	V
	Collector current	I_C	Continuous	Tc=80°C	100	A
		I_{CP}	1ms	Tc=80°C	200	
	Collector power dissipation	P_C	1 device		520	W
	Repetitive peak reverse voltage (Diode)	V_{RRM}			1200	V
Converter	Repetitive peak reverse voltage	V_{RRM}			1600	V
	Average output current	I_O	50Hz/60Hz, sine wave		150	A
	Surge current (Non-Repetitive)	I_{FSM}	10ms, Tj=150°C half sine wave		780	A
	I^2t (Non-Repetitive)	I^2t			3000	A^2s
Junction temperature		Tj	Inverter, Brake		175	°C
			Converter		150	
Operating junciton temperature (under switching conditions)		Tjop	Inverter, Brake		150	
			Converter		150	
Case temperature		Tc			125	
Storage temperature		Tstg			-40~+125	
Isolation voltage	between terminal and copper base (*1) between thermistor and others (*2)	V_{iso}	AC : 1min.		2500	VAC
Screw torque	Mounting (*3)	-	M5		3.5	N m

Note *1: All terminals should be connected together during the test.
Note *2: Two thermistor terminals should be connected together, other terminals should be connected together and shorted to base plate during the test.
Note *3: Recommendable value : 2.5-3.5 Nm (M5)

● Electrical characteristics (at Tj= 25°C unless otherwise specified)

	Items	Symbols	Conditions		Characteristics min.	typ.	max.	Units
Inverter	Zero gate voltage collector current	I_{CES}	V_{GE} = 0V, V_{CE} = 1200V		-	-	1.0	mA
Inverter	Gate-Emitter leakage current	I_{GES}	V_{GE} = 0V, V_{GE} = ±20V		-	-	200	nA
Inverter	Gate-Emitter threshold voltage	$V_{GE(th)}$	V_{CE} = 20V, I_C = 150mA		6.0	6.5	7.0	V
Inverter	Collector-Emitter saturation voltage	$V_{CE(sat)}$ (terminal)	V_{GE} = 15V, I_C = 150A	Tj=25°C	-	2.45	2.90	V
				Tj=125°C	-	2.80	-	
				Tj=150°C	-	2.85	-	
		$V_{CE(sat)}$ (chip)	V_{GE} = 15V, I_C = 150A	Tj=25°C	-	1.85	2.30	
				Tj=125°C	-	2.20	-	
				Tj=150°C	-	2.25	-	
Inverter	Internal gate resistance	Rg(int)	-		-	5	-	Ω
Inverter	Input capacitance	Cies	V_{CE} = 10V, V_{GE} = 0V, f = 1MHz		-	12.5	-	nF
Inverter	Turn-on time	ton	V_{CC} = 600V, I_C = 150A, V_{GE} = +15 / -15V, R_G = 1.8Ω		-	0.39	1.20	μs
		tr			-	0.09	0.60	
		tr (i)			-	0.03	-	
	Turn-off time	toff			-	0.53	1.00	
		tf			-	0.06	0.30	
Inverter	Forward on voltage	V_F (terminal)	I_F = 150A	Tj=25°C	-	2.50	2.95	V
				Tj=125°C	-	2.80	-	
				Tj=150°C	-	2.75	-	
		V_F (chip)	I_F = 150A	Tj=25°C	-	1.90	2.35	
				Tj=125°C	-	2.20	-	
				Tj=150°C	-	2.15	-	
Inverter	Reverse recovery time	trr	I_F = 150A		-	-	0.35	μs
Brake	Zero gate voltage collector current	I_{CES}	V_{GE} = 0V, V_{CE} = 1200V		-	-	1.0	mA
Brake	Gate-Emitter leakage current	I_{GES}	V_{CE} = 0V, V_{GE} = +20 / -20V		-	-	200	nA
Brake	Collector-Emitter saturation voltage	$V_{CE(sat)}$ (terminal)	V_{GE} = 15V, I_C = 100A	Tj=25°C	-	2.15	2.60	V
				Tj=125°C	-	2.45	-	
				Tj=150°C	-	2.50	-	
		$V_{CE(sat)}$ (chip)	V_{GE} = 15V, I_C = 100A	Tj=25°C	-	1.75	2.20	
				Tj=125°C	-	2.05	-	
				Tj=150°C	-	2.10	-	
Brake	Internal gate resistance	Rg(int)	-		-	8	-	Ω
Brake	Turn-on time	ton	V_{CE} = 600V, I_C = 100A, V_{GE} = +15 / -15V, R_G = 1.6Ω		-	0.39	1.20	μs
		tr			-	0.09	0.60	
	Turn-off time	toff			-	0.53	1.00	
		tf			-	0.06	0.30	
Brake	Reverse current	I_{RRM}	V_R = 1200V		-	-	1.00	mA
Converter	Forward on voltage	V_{FM} (chip)	I_F = 150A	terminal	-	2.00	2.45	V
				chip	-	1.40	-	
Converter	Reverse current	I_{RRM}	V_R = 1600V		-	-	1.0	mA
Thermistor	Resistance	R	T = 25°C		-	5000	-	Ω
			T = 100°C		465	495	520	
Thermistor	B value	B	T = 25 / 50°C		3305	3375	3450	K

● Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics min.	typ.	max.	Units
Thermal resistance (1device)	Rth(j-c)	Inverter IGBT	-	-	0.17	°C/W
		Inverter FWD	-	-	0.31	
		Brake IGBT	-	-	0.29	
		Converter Diode	-	-	0.24	
Contact thermal resistance (1device) (*4)	Rth(c-f)	with Thermal Compound	-	0.05	-	

Note *4: This is the value which is defined mounting on the additional cooling fin with thermal compound.

■ Characteristics (Representative)

[Inverter]
Collector current vs. Collector-Emitter voltage (typ.)
Tj= 25°C / chip

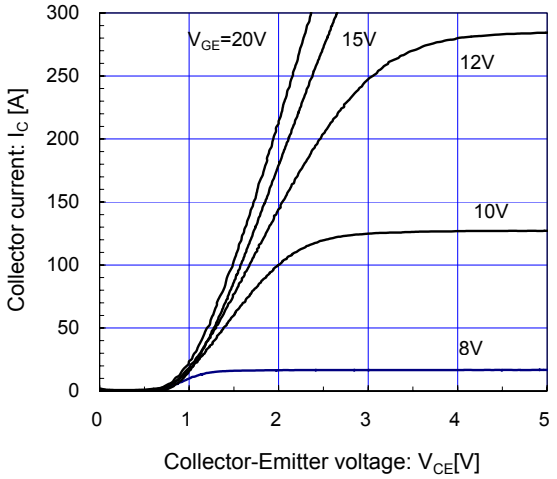

[Inverter]
Collector current vs. Collector-Emitter voltage (typ.)
Tj= 150°C / chip

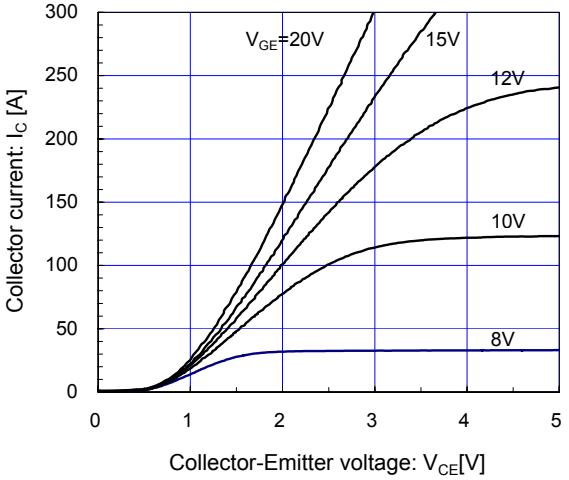

[Inverter]
Collector current vs. Collector-Emitter voltage (typ.)
V_{GE}=15V / chip

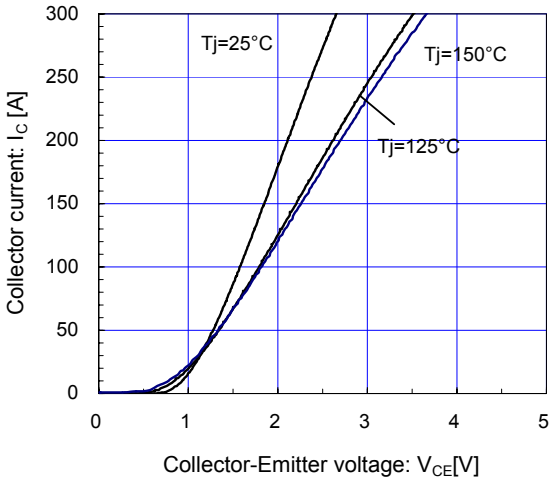

[Inverter]
Collector-Emitter voltage vs. Gate-Emitter voltage (typ.)
Tj= 25°C / chip

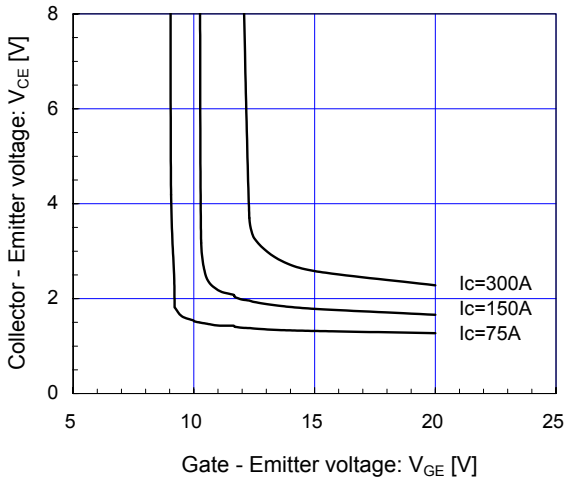

[Inverter]
Capacitance vs. Collector-Emitter voltage (typ.)
V_{GE}=0V, f= 1MHz, Tj= 25°C

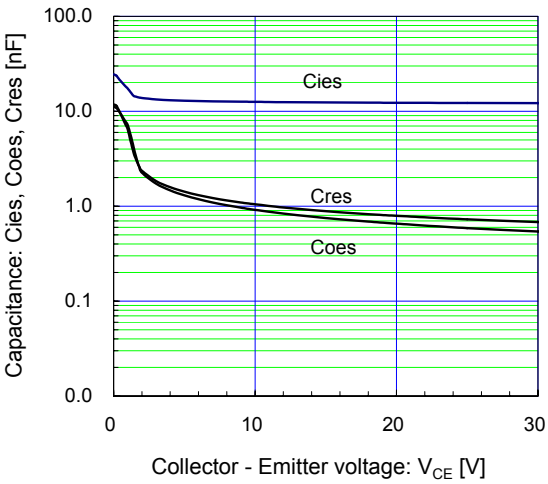

[Inverter]
Dynamic gate charge (typ.)
Vcc=600V, Ic=150A, Tj= 25°C

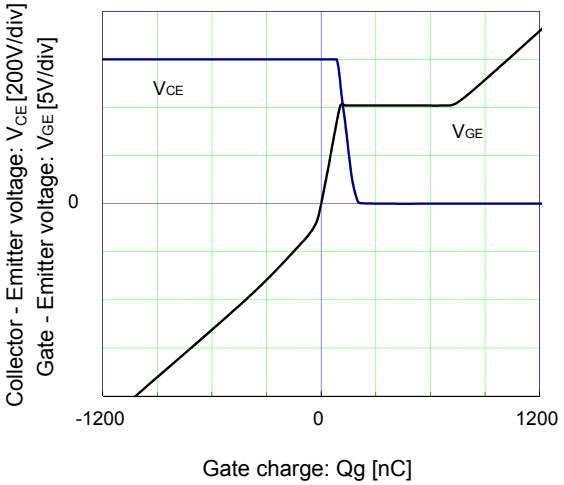

[Inverter]
Switching time vs. Collector current (typ.)
Vcc=600V, V_{GE}=±15V, Rg=1.8Ω, Tj=125°C

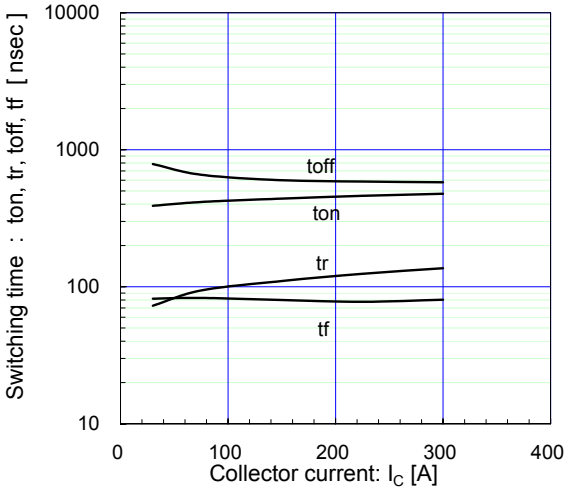

[Inverter]
Switching time vs. Collector current (typ.)
Vcc=600V, V_{GE}=±15V, Rg=1.8Ω, Tj=150°C

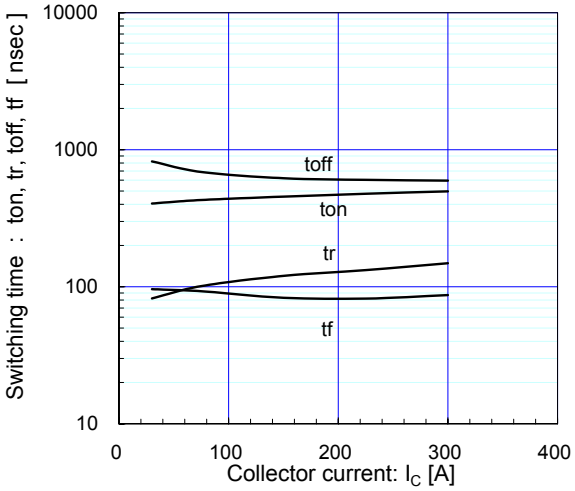

[Inverter]
Switching time vs. gate resistance (typ.)
Vcc=600V, Ic=150A, V_{GE}=±15V, Tj=125°C

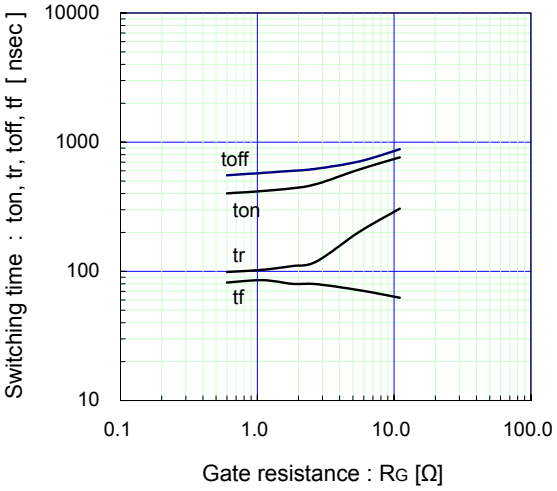

[Inverter]
Switching loss vs. Collector current (typ.)
Vcc=600V, V_{GE}=±15V, Rg=1.8Ω

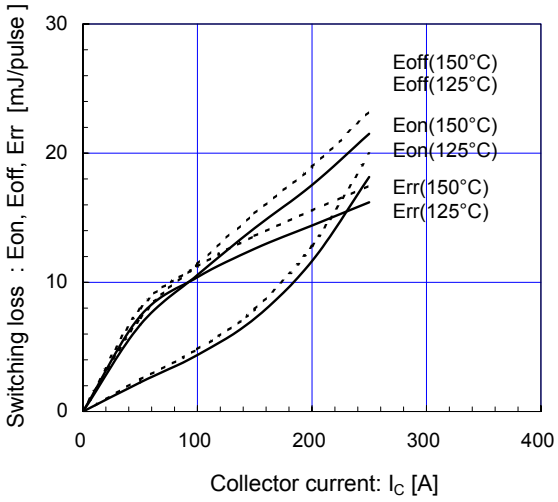

[Inverter]
Switching loss vs. gate resistance (typ.)
Vcc=600V, Ic=150A, V_{GE}=±15V

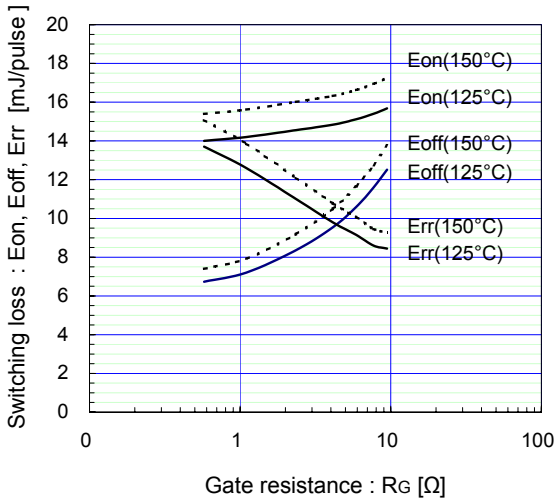

[Inverter]
Reverse bias safe operating area (max.)
+V_{GE}=15V, -V_{GE} <= 15V, Rg >=1.8Ω, Tj = 150°C

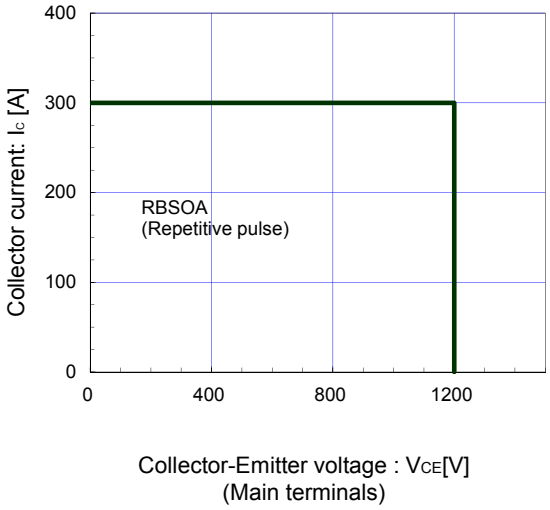

[Inverter]
Forward current vs. forward on voltage (typ.)
chip

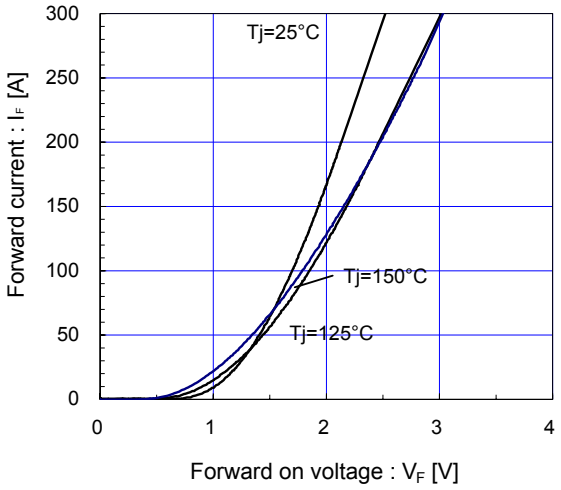

[Inverter]
Reverse recovery characteristics (typ.)
Vcc=600V, V_{GE}=±15V, Rg=1.8Ω

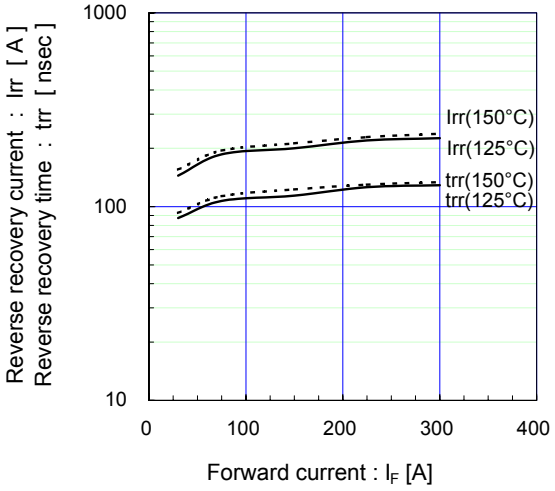

[Converter]
Forward current vs. forward on voltage (typ.)
chip

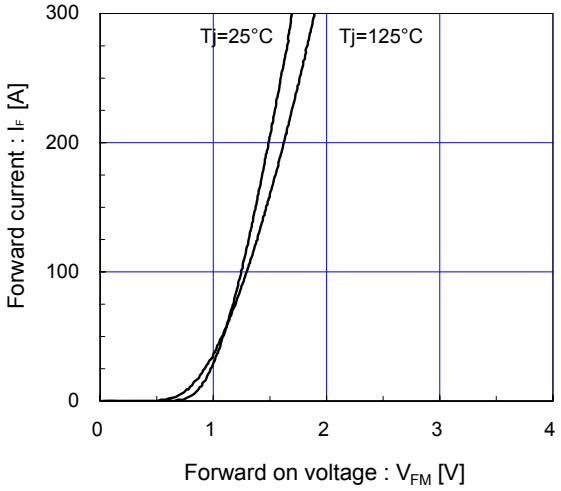

Transient thermal resistance (max.)

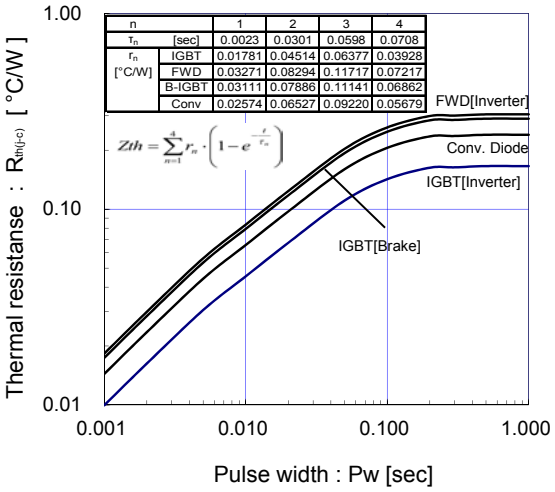

n		1	2	3	4
τ_n	[sec]	0.0023	0.0301	0.0598	0.0708
r_n [°C/W]	IGBT	0.01781	0.04514	0.06377	0.03928
	FWD	0.03271	0.08294	0.11717	0.07217
	B-IGBT	0.03111	0.07886	0.11141	0.06862
	Conv	0.02574	0.06527	0.09220	0.05679

$$Zth = \sum_{n=1}^{4} r_n \cdot \left(1 - e^{-\frac{t}{\tau_n}}\right)$$

[Thermistor]
Temperature characteristic (typ.)

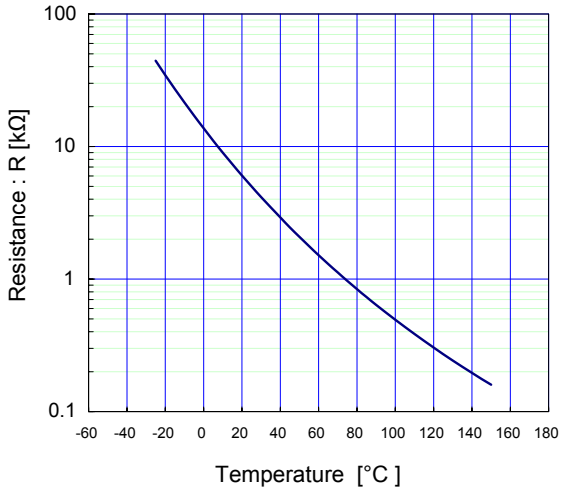

[Brake]
Collector current vs. Collector-Emitter voltage (typ.)
Tj= 25°C / chip

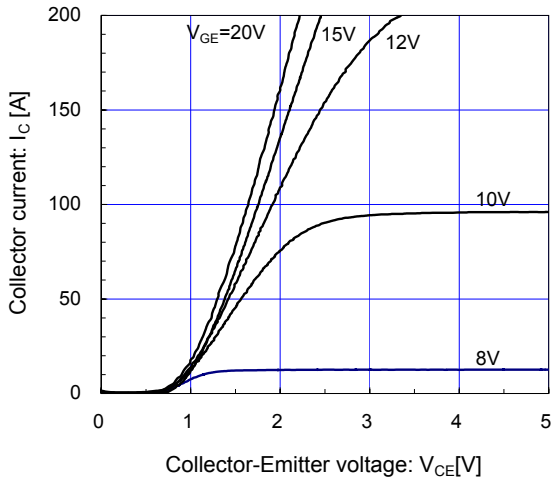

[Brake]
Collector current vs. Collector-Emitter voltage (typ.)
Tj= 150°C / chip

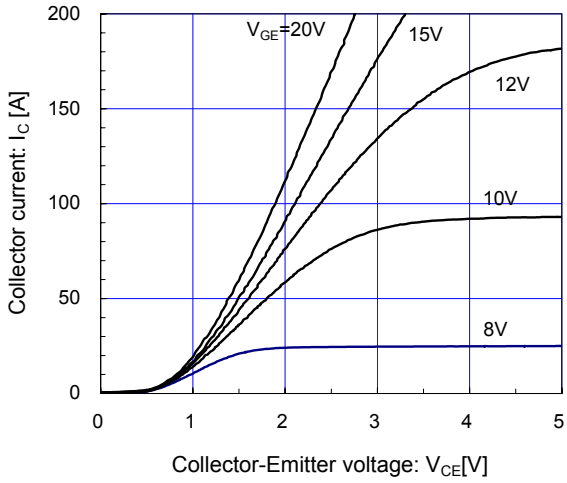

[Brake]
Collector current vs. Collector-Emitter voltage (typ.)
VGE=15V / chip

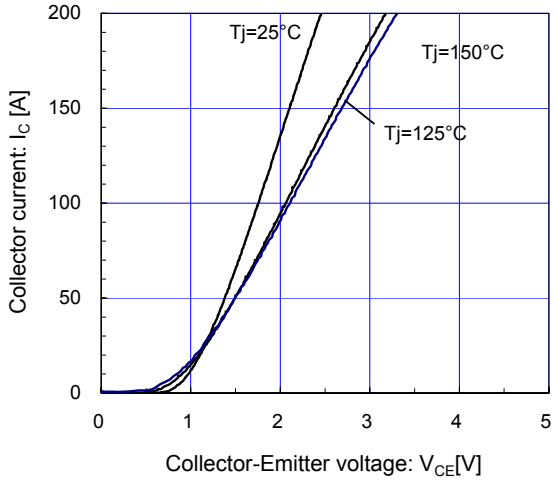

[Brake]
Collector-Emitter voltage vs. Gate-Emitter voltage (typ.)
Tj= 25°C / chip

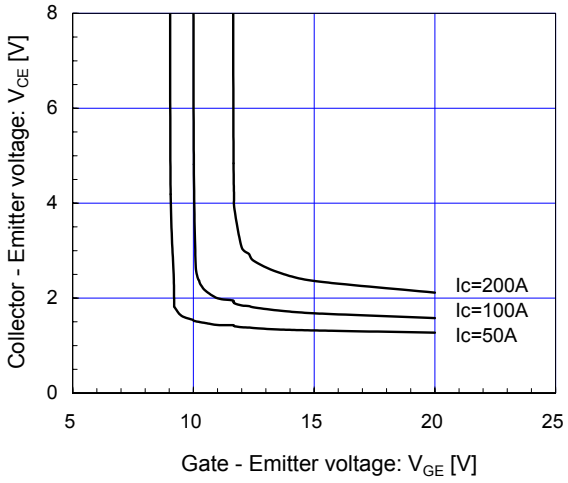

[Brake]
Capacitance vs. Collector-Emitter voltage (typ.)
VGE=0V, f= 1MHz, Tj= 25°C

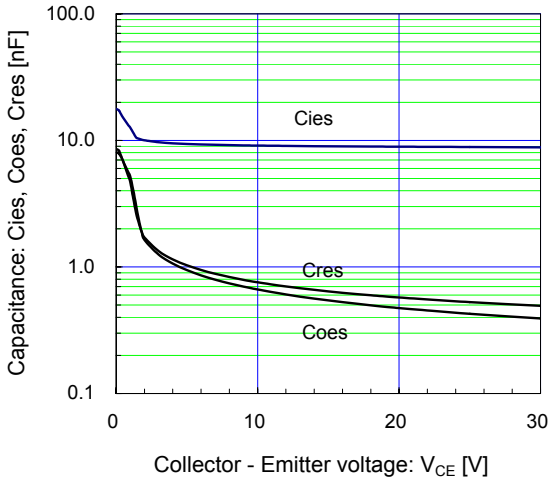

[Brake]
Dynamic gate charge (typ.)
Vcc=600V, Ic=100A, Tj= 25°C

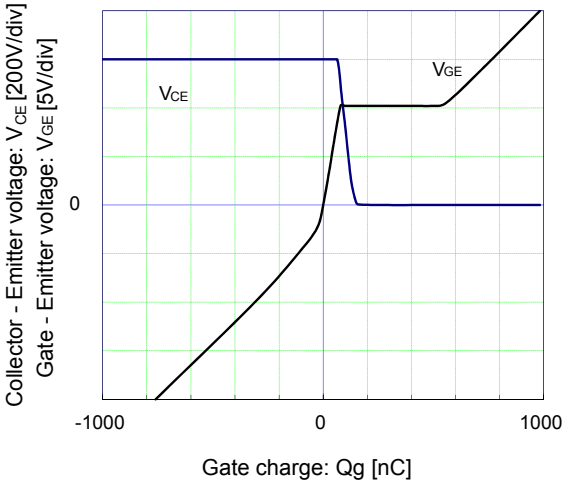

■ Outline Drawings (Unit:mm)

shows theoretical dimension.
( ) shows reference dimension.

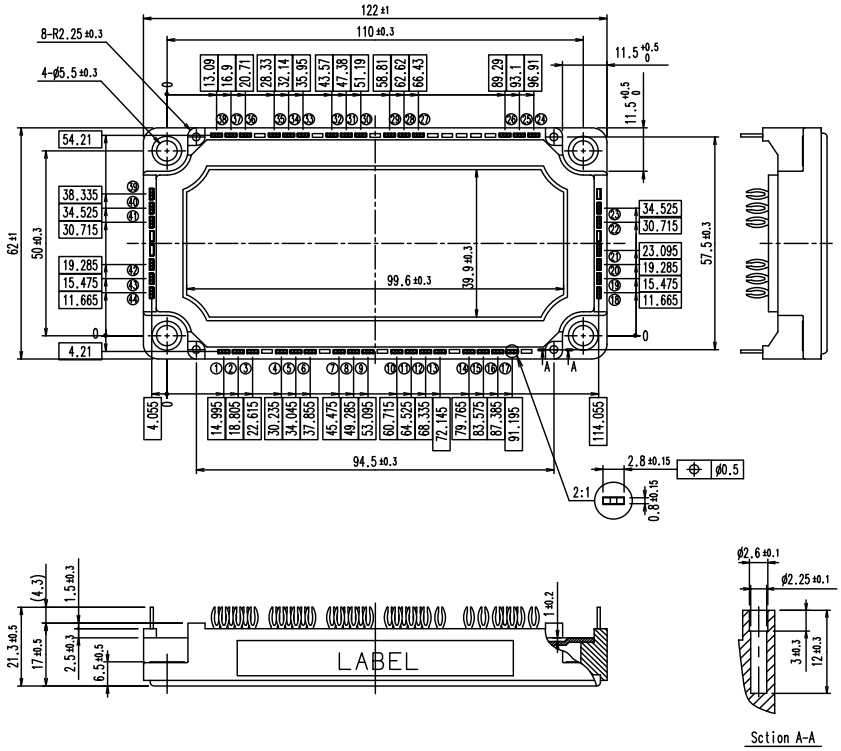

Weight: 310g(typ.)

■ Equivalent Circuit

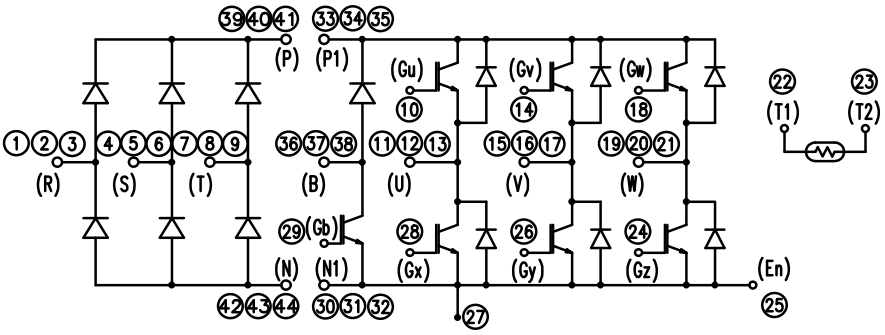

WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of March 2014.
The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sur to obtain the latest specifications.

2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.

3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design failsafe, flame retardant, and free of malfunction.

4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
• Computers • OA equipment • Communications equipment (terminal devices) • Measurement equipment
• Machine tools • Audiovisual equipment • Electrical home appliances • Personal equipment • Industrial robots etc.

5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
• Transportation equipment (mounted on cars and ships) • Trunk communications equipment
• Traffic-signal control equipment • Gas leakage detectors with an auto-shut-off feature
• Emergency equipment for responding to disasters and anti-burglary devices • Safety devices
• Medical equipment

6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
• Space equipment • Aeronautic equipment • Nuclear control equipment
• Submarine repeater equipment

7. Copyright ©1996-2014 by Fuji Electric Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.

8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.