

MITSUBISHI ELECTRIC CORPORATION
PUBLIC RELATIONS DIVISION
7-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo, 100-8310 Japan

FOR IMMEDIATE RELEASE

No. 3035

Customer Inquiries

Media Inquiries

LCD Marketing Dept.
Mitsubishi Electric Corporation

Public Relations Division
Mitsubishi Electric Corporation
prd.gnews@nk.MitsubishiElectric.co.jp

www.MitsubishiElectric.com/semiconductors/

www.MitsubishiElectric.com/news

Mitsubishi Electric to Expand Lineup of Color TFT-LCD Modules with Projected Capacitive Touch Panels for Industrial Application

Featuring market-leading touch functionality and sensitivity combined with max. 5 mm-thick cover glass

TOKYO, July 14, 2016 – [Mitsubishi Electric Corporation](http://www.mitsubishielectric.com) (TOKYO: 6503) announced today the launch of 6.5-inch VGA and 8.4-inch SVGA / XGA color TFT-LCD modules equipped with projected capacitive touch panels using cover glass of up to 5 millimeters in thickness. Sample sales will begin on August 1 via Mitsubishi Electric offices worldwide.



6.5-inch VGA



8.4-inch SVGA / XGA

Mitsubishi Electric Color TFT-LCD module with projected capacitive touch panel

These new modules are designed to meet increasing industrial demand for thick cover glass and glass allowing operation with gloves. They also facilitate multi-touch sensing and accurate sensing even on wet screens. The combination of these cutting-edge touch capabilities and Mitsubishi's proven TFT-LCD technology will support diverse applications and installation scenarios.

Product Features

- 1) ***Projected capacitive touch panels offering superior operability for diverse industrial uses***
 - Thick, 5-millimeter cover glass withstanding rugged usage
 - Ten-point touch operation with accurate sensing
 - High-level operability, even using gloves or on wet screens

2) **Total touch-panel solution**


- One-stop solution for TFT-LCD, touch panel and touch-control board
- Optional optical bonding (resin bonding of the TFT-LCD module, touch-panel sensor and cover glass, offering clearer images in bright light)
- Tempered cover glass and anti-reflection/anti-smudge surface treatment allowing a wider range of uses
- Factory-installed TFT-LCD, PCAP touch panel, cover glass and touch controller offering superior reliability

Sample Sale Schedule

Product	Model	Display Size	Resolution	Brightness (cd/m ²)	Viewing angle (°) <U/D>, <L/R>	Shipment
TFT-LCD Modules with Projected Capacitive Touch Panels	AA065VE11ADA11	6.5-inch	VGA	1000	80/60, 80/80	August 1, 2016
	AA084SC01ADA11	8.4-inch	SVGA	400	85/85, 85/85	
	AA084SD01ADA11			400	80/60, 80/80	
	AA084SD11ADA11			900	80/60, 80/80	
	AA084XD01ADA11		XGA	500	85/85, 85/85	
	AA084XD11ADA11			800	85/85, 85/85	
	AA084XE01ADA11			400	80/60, 80/80	
	AA084XE11ADA11			800	80/60, 80/80	

Projected Capacitive Touch (PCAP)

Capacitive touch is a touch screen technology that uses two perpendicular layers of conductive material to form a grid. When electric current is applied, a uniform electrostatic field is created. The touch of a finger or other conductive object distorts the field, allowing the system to accurately track movement across the screen at multiple points. This technology is commonly used in smartphones and tablets.

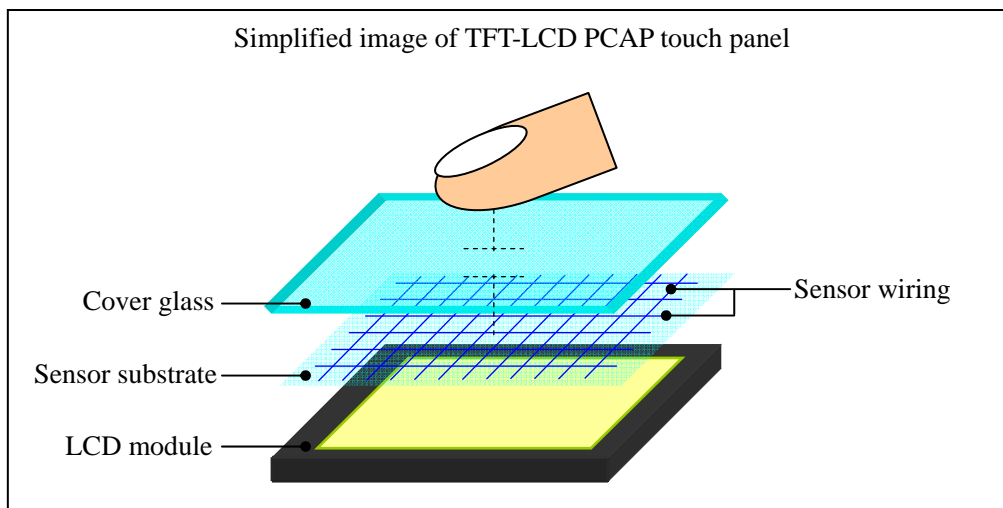

Lineup of Color TFT-LCD Modules with Projected Capacitive Touch Panels (new models in bold)

Display Size	Resolution	Brightness (cd/m ²)	Viewing angle (°) <U/D>, <L/R>	Model
7.0-inch	WVGA	800	85/85, 85/85	AA070MC01ADA11
		1000	85/85, 85/85	AA070MC11ADA11
		800	60/80, 80/80	AA070ME01ADA11
		1200	60/80, 80/80	AA070ME11ADA11
6.5-inch	VGA	1000	80/60, 80/80	AA065VE11ADA11
8.4-inch	SVGA	400	85/85, 85/85	AA084SC01ADA11
		400	80/60, 80/80	AA084SD01ADA11
		900	80/60, 80/80	AA084SD11ADA11
	XGA	500	85/85, 85/85	AA084XD01ADA11
		800	85/85, 85/85	AA084XD11ADA11
		400	80/60, 80/80	AA084XE01ADA11
		800	80/60, 80/80	AA084XE11ADA11

Specifications

Model	AA065VE11ADA11	
Display size/resolution	16.6cm (6.5 inches) VGA	
Display area (mm)	132.48 (H) × 99.36 (V)	
Number of dots	640 (H) × 480 (V)	
Pixel pitch (mm)	0.207 (H) × 0.207 (V)	
Contrast ratio	600:1	
Luminance (cd/m ²)	1,000	
Viewing angle (°) <U/D>, <L/R>	80/60, 80/80	
Colors	262K (6 bits/color), 16.7M (8 bits/color)	
Electrical interface	LVDS 6/8 bits	
Size (mm)	W	170.2 (LCD: 154.0)
	H	132.6 (LCD: 121.0)
	D	14.3 (LCD: 11.0)*
Operational temperatures (°C)	-30 to +70	
Storage temperatures (°C)	-30 to +80	
Glass thickness (mm)	Up to 5	
Black mask printing	Available	
Strengthening treatment	Available	
Low-reflection treatment	Available	
Anti-smudge treatment	Available	
Optical bonding	Available	
Controller interface	USB	
Operating systems**	Windows7/8.1 and Linux	

Model		AA084SC01ADA11	AA084SD01ADA11	AA084SD11ADA11
Display size/resolution		21.3cm (8.4 inches) SVGA		
Display area (mm)		170.4 (H) × 127.8 (V)		
Number of dots		800 (H) × 600 (V)		
Pixel pitch (mm)		0.213 (H) × 0.213 (V)		
Contrast ratio		1000:1	600:1	
Luminance (cd/m ²)		400		900
Viewing angle (°) <U/D>, <L/R>		85/85, 85/85		80/60, 80/80
Colors		262K (6 bits/color), 16.7M (8 bits/color)		
Electrical interface		LVDS 6/8 bits		
Size (mm)	W	209.5 (LCD : 199.5)		
	H	159 (LCD : 149.0)		
	D	14.4 (LCD : 9.7)*		
Operational temperatures (°C)		-30 to +70		
Storage temperatures (°C)		-30 to +80		
Glass thickness (mm)		Up to 5		
Black mask printing		Available		
Strengthening treatment		Available		
Low-reflection treatment		Available		
Anti-smudge treatment		Available		
Optical bonding		Available		
Controller interface		USB		
Operating systems**		Windows7/8.1 and Linux		

Model		AA084XD01 ADA11	AA084XD11 ADA11	AA084XE01 ADA11	AA084XE11 ADA11
Display size/resolution		21.3cm (8.4 inches) XGA			
Display area (mm)		170.496 (H) × 127.872 (V)			
Number of dots		1024 (H) × 768 (V)			
Pixel pitch (mm)		0.1665 (H) × 0.1665 (V)			
Contrast ratio		1000:1		800:1	
Luminance (cd/m ²)		500	800	400	800
Viewing angle (°) <U/D>, <L/R>		85/85, 85/85		80/60, 80/80	
Colors		262K (6 bits/color), 16.7M (8 bits/color)			
Electrical interface		LVDS 6/8 bits			
Size (mm)	W	209.5 (LCD : 199.5)			
	H	159 (LCD : 149.0)			
	D	14.4 (LCD : 9.7)*			
Operational temperatures (°C)		-30 to +70			
Storage temperatures (°C)		-30 to +80			
Glass thickness (mm)		Up to 5			
Black mask printing		Available			
Strengthening treatment		Available			
Low-reflection treatment		Available			
Anti-smudge treatment		Available			
Optical bonding		Available			
Controller interface		USB			
Operating systems**		Windows7/8.1 and Linux			

* Depends on cover glass thickness (1.1 mm thickness in this example)

** Support for other operating systems is available upon request.

Environmental Awareness

The model is mercury-free and fully compliant with the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) directive 2011/65/EU.

###

About Mitsubishi Electric Corporation

With over 90 years of experience in providing reliable, high-quality products, Mitsubishi Electric Corporation (TOKYO: 6503) is a recognized world leader in the manufacture, marketing and sales of electrical and electronic equipment used in information processing and communications, space development and satellite communications, consumer electronics, industrial technology, energy, transportation and building equipment. Embracing the spirit of its corporate statement, Changes for the Better, and its environmental statement, Eco Changes, Mitsubishi Electric endeavors to be a global, leading green company, enriching society with technology. The company recorded consolidated group sales of 4,394.3 billion yen (US\$ 38.8 billion*) in the fiscal year ended March 31, 2016. For more information visit:

www.MitsubishiElectric.com

*At an exchange rate of 113 yen to the US dollar, the rate given by the Tokyo Foreign Exchange Market on March 31, 2016

Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

Linux is the registered trademark of Linus Torvalds in the United States and other countries.