




## 1000Vdc Single & Dual Output 1 Watt Dc-Dc Converter

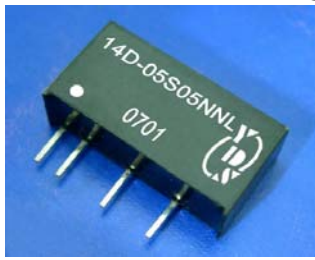

### FEATURES:

- 7PIN SIP Package
- High Efficiency up to 85%
- Unregulated Output Types
- Internal SMD Construction
- No External Component Required
- Industry Standard Pinout
- Operating Temperature:-40°C TO +85°C



### Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Efficiency	Package Style
	Vdc	mA	%TYP	
14D-XXS03NNL	3.3	303	70	1
14D-XXS05NNL	5	200	70	1
14D-XXS09NNL	9	112	75	1
14D-XXS12NNL	12	84	78	1
14D-XXS15NNL	15	67	80	1
14D-XXS24NNL	24	42	82	1
14D-XXD03NNL	±3.3	±150	70	1
14D-XXD05NNL	±5	±100	70	1
14D-XXD09NNL	±9	±56	75	1
14D-XXD12NNL	±12	±42	78	1
14D-XXD15NNL	±15	±34	80	1
14D-XXD24NNL	±24	±21	82	1
14D-XXS05N2NL	5	200	70	2
14D-XXS09N2NL	9	112	75	2
14D-XXS12N2NL	12	84	78	2
14D-XXS15N2NL	15	67	80	2
14D-XXS24N2NL	24	42	82	2
14D-XXD05N2NL	±5	±100	70	2
14D-XXD09N2NL	±9	±56	75	2
14D-XXD12N2NL	±12	±42	78	2
14D-XXD15N2NL	±15	±34	80	2
14D-XXD24N2NL	±24	±21	82	2

Note: 1. "XX" is Input Voltage: 03=3.3Vdc, 05=5Vdc, 09=9Vdc, 12=12Vdc, 15=15Vdc, 24=24Vdc, 48=48Vdc. 2. Over 48Vdc input voltage, using the 2nd package.  
3. The input voltage increases, there will be an increase in efficiency.

### Input Specifications


Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo, Io Nom			±10	%
Filter	Capacitor				

### Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit	Short Term			1 Sec	
Line Regulation	For 1.0% OF Vin		1.2		%
Load Regulation	3.3V,5V(10% To 100% F.L)			15	%
Load Regulation	9V,12V,15V,24V(10% To 100% F.L)			10	%
Ripple & Noise	BW=DC To 20MHz			100	mVp-p
Transient response setting time	50% load step change		350		us

### General Specifications

Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency	Full load,nominal input		100		KHz
Operating		-40		+85	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight	Package1 or Package2		2.1 or 2.7		g
Dimensions	Package 1	19.5x6.0x10.0			mm
Dimensions	Package 2	19.5x7.1x10.0			mm

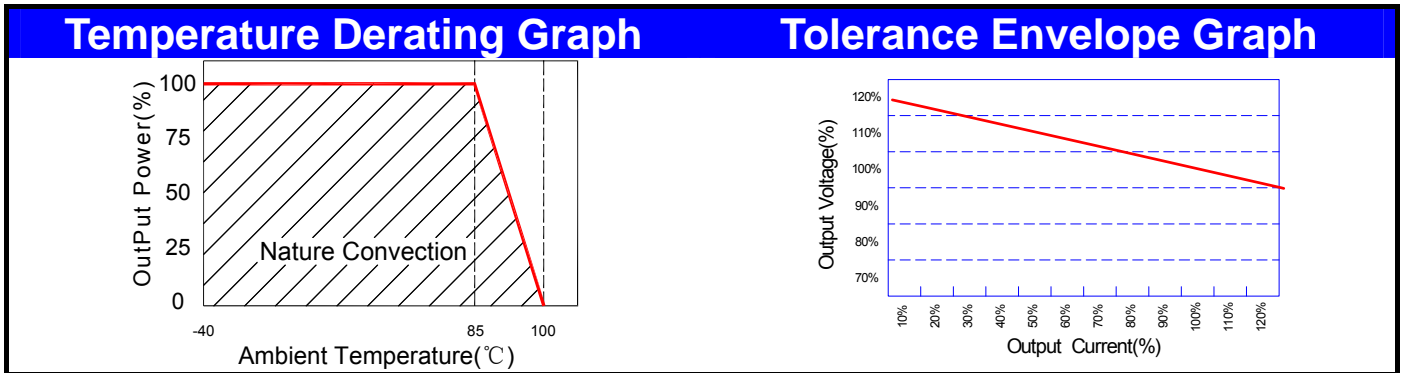

### Recommended Test Circuit

**Single**

3.3V:Cin 4.7uF,25V 3.3V:Cout 22uF,25V  
 5V:Cin 4.7uF,25V 5V:Cout 10uF,25V  
 9V:Cin 4.7uF,25V 9V:Cout 4.7uF,25V  
 12V:Cin 2.2uF,25V 12V:Cout 2.2uF,25V  
 15V:Cin 1uF,50V 15V:Cout 1uF,50V  
 24V:Cin 1uF,50V 24V:Cout 1uF,50V  
 48V:Cin 1uF,100V

**Dual**

3.3V:Cin 4.7uF,25V 3.3V:Cout 22uF,25V  
 5V:Cin 4.7uF,25V 5V:Cout 10uF,25V  
 9V:Cin 4.7uF,25V 9V:Cout 4.7uF,25V  
 12V:Cin 2.2uF,25V 12V:Cout 2.2uF,25V  
 15V:Cin 1uF,50V 15V:Cout 1uF,50V  
 24V:Cin 1uF,50V 24V:Cout 1uF,50V  
 48V:Cin 1uF,100V

### Part Number

14D - 05 S 05 N 2 NL  
 A B C D E F G

A:Series  
 B:Input Voltage  
 C:Single(S)Dual(D)  
 D:Output Voltage  
 E:Unregulated(N)  
 F:Package  
 G:RoHS Version

### Markings and Dimensions

1

19.50  
6.00  
10.00  
4.0  
0.50±0.05  
2.54  
1.25  
2.00  
12.70  
0.25±0.05

printed face

2

19.50  
7.10  
10.00  
4.0  
0.50±0.05  
2.54  
1.25  
2.00  
12.70  
0.25±0.05

printed face

UNIT:mm Unless otherwise specified,all tolerances are ±0.25

### Packaging

UNIT:mm

Size(mm)			
A	B	C	D
9.50	16.50	522	5.00

### PIN Connection

Pin	1	2	4	5	6
Single	+Vin	-Vin	-Vout	NO PIN	+Vout
Dual	+Vin	-Vin	-Vout	Common	+Vout