Fast & Soft Recovery Diode

DBA200UA40

IF(AV)= 2x100A, VRRM=400V, trr=100ns

SanRex Fast & Soft Recovery Diode Module DBA200UA40 is designed for applications requiring fast switching and soft recovery wave shape to reduce or eliminate the need for snubber components in the circuit. The modules are isolated for easy mounting with other components or a common heatsink.

Features

- * Very Fast Reverse Recovery Time
- * Soft Recovery Characteristics
- * Low Forward Voltage Drop
- * Compact isolated SOT-227 package

Typical Applications

- * Welding and Plasma Cutting Machines
- * DC chopper
- * Rectifier in Switch Mode Power Supplies (SMPS)
- * Uninterruptible Power Supplies (UPS)
- * Free Wheeling Diode in converters and motor control circuits



Internal schematic diagram

< Maximum Ratings >


$Ti = 25^{\circ}C$ (unless otherwise noted) per diode

(Muximu					
Symbol		Item	Conditions	Ratings	Unit
V _{RRM}	Repetitive Peak Reverse			400	V
	Voltage				
V _{R(DC)}	Reverse D.C. Voltage			320	V
I _{F(AV)}	Average Forward Current		D.C., T _C = 96°C	100	А
I _{FSM}	Surge Forward Current		1/2 cycle, 60Hz, Peak value, non-repetitive	700	А
l ² t	I ² t (for fusing)		Value for one cycle surge current	2100	A ² s
Tj	Junction Temperature			-40 to +150	°C
Tstg	Storage Temperature			-40 to +125	°C
VISO	Isolation Voltage (R.M.S.)		A.C. 1 minute	2500	V
	Mounting	Mounting M4	Recommended 1.0-1.4	1.5	N∙m
	Torque	Terminal M4	Recommended 1.0-1.4	1.5]
	Mass		Typical Value	30	g

Fast & Soft Recovery Diode

DBA200UA40

< Electric	cal Characteristics >	Tj= 25 [°] C (C (unless otherwise noted) per diode				
Symbol	Item	Conditions	Ratings			Unit	
			Min.	Тур.	Max.		
I _{RRM}	Repetitive Peak Reverse Current	V _R = V _{RRM,} Tj= 150°C			100	mA	
V _{FM}	Forward Voltage Drop	I _F = 100A, Inst. measurement		1.05	1.20	V	
t _{rr}	Reverse Recovery Time	I _F = 100A, V _R =200V, -di / dt = 200A/Fs		100	130	n s	
Rth(j-c)	Thermal Resistance	Junction to case			0.45	°C/W	

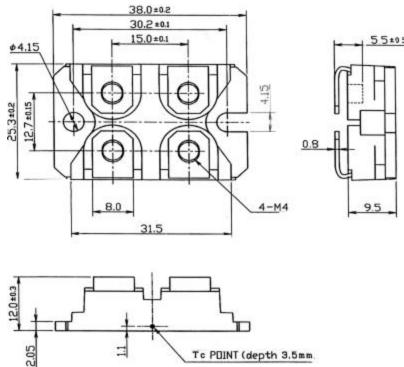

* Dimensions in millimeters

5.5±05